

Non-Metallic Systems

Adaptalok Type SFA




Technical Characteristics


Conforms to	BSI Kitemark KM-35161 Low voltage directive Lloyd's Register of Shipping (Type Approval) NFF 16-10/12 I4,F2
-------------	----------------------------------------------------------------------------------------------------------------------

Approvals and Standards	   
-------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Degree of mechanical protection	High Impact Resistance
---------------------------------	------------------------

Degree of protection	IP66 - As standard IP67 - When fitted with ALS Seal IP68 - When fitted with ALS Seal (1.1 Bar 35 mins) IP69k - When fitted with ALS Seal	ALS Seal 
----------------------	---------------------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------

UV protection	Very High
---------------	-----------

Fitting Characteristics	 Straight fitting - Swivel internal female thread Black (BL) as standard or Grey (GR) - RAL 7031
-------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Application	For insertion into thread entries & knockouts using a locknut to secure
-------------	-------------------------------------------------------------------------

Normal operating temperature range	Application	Min Temp	Max Temp
	Static	- 50°C	+120°C
	Dynamic	- 45°C	+120 °C

For use with - Conduit Series	Light, Standard and Heavyweight variants of type PA , PI , CP , PR , PADL & PF
-------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Fire performance	Test Standard	Performance Rating	
	BS EN 61386-1 & 23	Approved	
	NFF16-101	I4 F2	Self Extinguishing Low Smoke & Halogen Free
	ISO 4589-2	24.1%	
	BS EN 60695-2-11	850°C	
	UL94	V2	

Testing data	Click or See pages 4 & 5
--------------	----------------------------------------------------------

Type of material	Polyamide (Nylon) 66 Body - Nickel plated brass thread
------------------	--------------------------------------------------------



The Company's policy is one of continuous improvement and reserves the right to change specifications at any time without prior notice.

Non-Metallic Systems


Adaptalok Type SFA



Dimensional Data

Part No Black Body Metric Threads	Part No Grey Body Metric Threads	Thread A	Nominal Dimensions (mm)					Weight in grams (Each)
			B	C	D	E	F	
AL13/M16/SFA/BL	AL13/M16/SFA/GR	M16x1.5	14.0	54.2	21.2	11.2	20.6	29
AL16/M16/SFA/BL	AL16/M16/SFA/GR	M16x1.5	14.0	56.2	23.8	12.0	24.0	34
AL21/M20/SFA/BL	AL21/M20/SFA/GR	M20x1.5	15.3	59.0	29.1	16.0	27.0	39
AL28/M25/SFA/BL	AL28/M25/SFA/GR	M25x1.5	17.0	63.8	36.7	22.5	34.0	68
AL34/M32/SFA/BL	AL34/M32/SFA/GR	M32x1.5	17.0	65.2	43.2	28.9	42.0	95
AL42/M40/SFA/BL	AL42/M40/SFA/GR	M40x1.5	17.0	77.4	54.0	38.0	52.0	132
AL54/M50/SFA/BL	AL54/M50/SFA/GR	M50x1.5	17.0	86.0	68.8	48.5	70.0	270
AL54/M63/SFA/BL	AL54/M63/SFA/GR	M63x1.5	17.0	86.0	68.8	50.0	70.0	280

Metric	Standard thread conforming to EN60423 & BS3643		
	Thread Size	Ext Thread Outside Diameter	Int Thread Inside Diameter
M12	12mm	10.9mm	1.5mm
M16	16mm	14.4mm	1.5mm
M20	20mm	18.4mm	1.5mm
M25	25mm	23.4mm	1.5mm
M32	32mm	30.4mm	1.5mm
M40	40mm	38.4mm	1.5mm
M50	50mm	48.4mm	1.5mm
M63	63mm	61.4mm	1.5mm

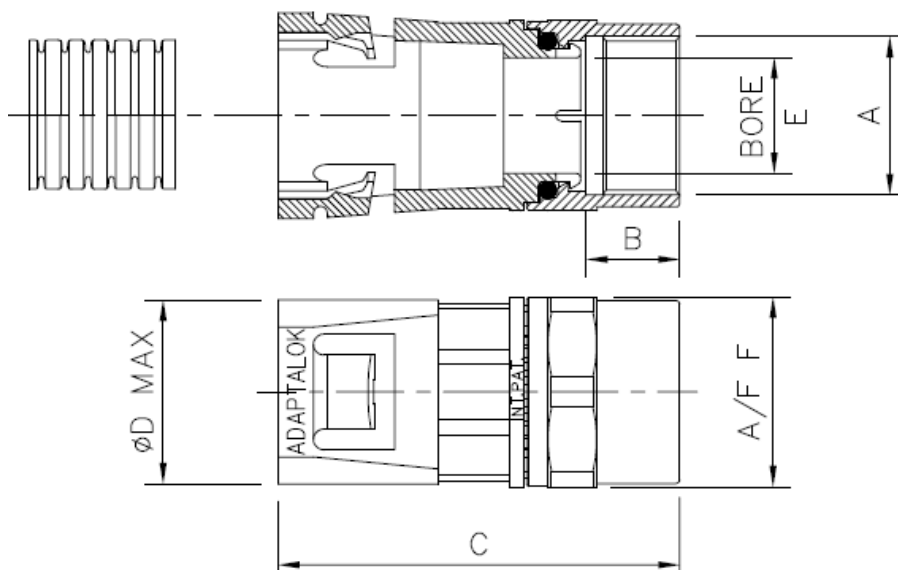

The Company's policy is one of continuous improvement and reserves the right to change specifications at any time without prior notice.

Non-Metallic Systems


Adaptalok Type SFA



Dimensional Data

Part No Black Body Metric Threads	Part No Grey Body Metric Threads	Thread A	Nominal Dimensions (mm)					Weight in grams (Each)
			B	C	D	E	F	
AL13/PG9/SFA/BL	AL13/PG9/SFA/GR	PG9	12.2	52.4	21.2	11.2	20.6	29
AL16/PG11/SFA/BL	AL16/PG11/SFA/GR	PG11	12.2	54.2	23.8	12.0	24.0	36
AL21/PG13/SFA/BL	AL21/PG13/SFA/GR	PG13	12.2	55.9	29.1	16.0	27.0	42
AL21/PG16/SFA/BL	AL21/PG16/SFA/GR	PG16	13.3	57.5	29.1	16.0	27.0	44
AL28/PG21/SFA/BL	AL28/PG21/SFA/GR	PG21	14.4	61.2	36.7	22.5	35.0	75
AL34/PG29/SFA/BL	AL34/PG29/SFA/GR	PG29	14.4	62.2	43.2	28.9	42.0	99
AL42/PG36/SFA/BL	AL42/PG36/SFA/GR	PG36	17.3	74.9	54.0	38.0	52.0	134
AL54/PG48/SFA/BL	AL54/PG48/SFA/GR	PG48	17.3	84.0	66.8	50.0	70.0	280

PG	German Standard Thread Conforming to DIN40430		
Thread Size	Ext Thread Outside Diameter	Int Thread Inside Diameter	Pitch
PG7	12.5mm	11.3mm	1.27mm
PG9	15.2mm	13.9mm	1.41mm
PG11	18.6mm	17.3mm	1.41mm
PG13.5	20.4mm	19.1mm	1.41mm
PG16	22.5mm	21.2mm	1.41mm
PG21	28.3mm	26.8mm	1.59mm
PG29	37mm	35.5mm	1.59mm
PG36	47mm	45.5mm	1.59mm
PG48	59.3mm	57.8mm	1.59mm

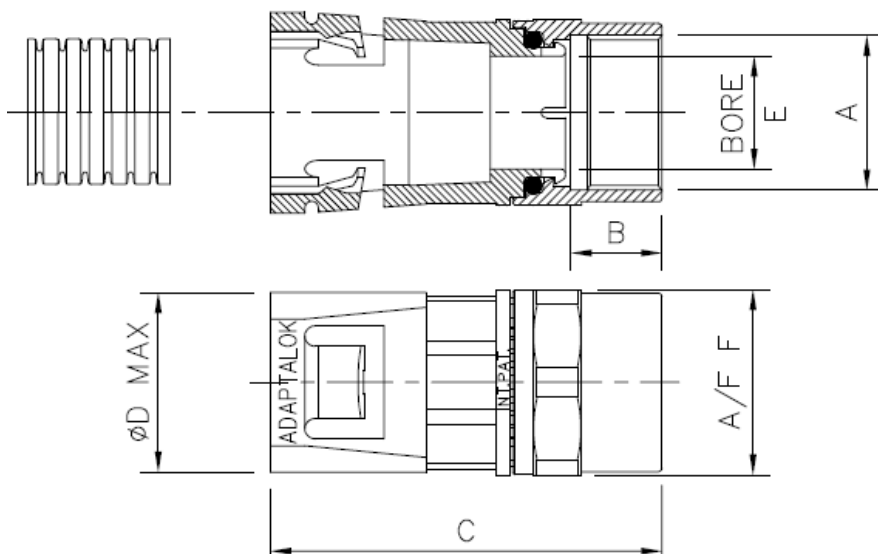

The Company's policy is one of continuous improvement and reserves the right to change specifications at any time without prior notice.

Non-Metallic Systems

Adaptalok Type SFA



BS EN 61386 Classification

	Fitting	Compression	Impact	Min temp	Max temp	bending	electrical	IP solids	IP water	Corrosion	Tensile	Non-flame Propogating	Suspended load
	AL	N/A	4	2	4	N/A	0	6	6	0	1	1	0

Mechanical Properties

Test Type	Methods / Standards	Requirements	Value
Tensile Strength	IEC61386-1	2 mins at Specified Value (<i>PAFS21 Conduit</i>)	Class 1
Tensile Strength		Ultimate Pullout (<i>PAFS21 Conduit</i>)	240N
Impact Strength @ -45°C	IEC61386-1	No visible damage	Class 1
Impact Strength @ -5°C	IEC61386-1	No visible damage	Class 3
Impact Strength @ 23°C	IEC61386-1	No visible damage	Class 5

Tensile Tests to IEC 61386 gives the minimum classification value only. Actual values will depend on the type and size of the fittings used and will always be greater than the minimum – Impact strength is the minimum classification value at the minimum temperature – actual values will depend on size and temperature. Specific values available on request.

Thermal Properties

Test Type	Methods / Standards	Requirements	Value
Dynamic Applications	IEC 61386-23	5000 Operations at MBR 2hrs	-45°C to +120°C
Static Short Term Temp		Temporary Use (3000hrs)	-50°C to +120°C
Static Long Term Temp		Permanent Use (30,000) Hours	-45°C to +105°C

The Company's policy is one of continuous improvement and reserves the right to change specifications at any time without prior notice.

Non-Metallic Systems

Adaptalok Type SFA



Flammability

Test Type	Method / Standard	Requirement	Result	Unit
Glow Wire	BS EN 60695-2-11	Extinguish within 30s	850°C	°C
Flammability	IEC 61386-1-12	1Kw Burner Flame to Self Extinguish	Pass	Pass/Fail
Oxygen Index	ISO 4589-2		24.1	%
Ignition Rating	NF F16-101	I Rating	I4	-

Smoke

Test Type	Method / Standard	Requirement	Result	Unit
Fume Rating	NF F16-101	F Rating	F2	-

Toxicity

Test Type	Method / Standard	Requirement	Result	Unit
Halogen Free	NFX 70-100	< 0.5%	Pass	Pass/Fail

Pre Test Conditions

Duration	Standard	Temperature	Relative Humidity
168 (Hours)	IEC61386	23 (°C)	50 (%)

Chemical Resistance Chart

Key:

Suitable :

Limited Suitability :

Unsuitable :

Not Tested :

	Astm No.1		Diesel oil		Methyl Bromide		Sulphur Dioxide (Gas)
	Astm No.2		Diethylamine		MEK		Sulphuric Acid (10%)
	Astm No.3		Ethanol		Nitric Acid (10%)		Sulphuric Acid (70%)
	Acetic Acid (10%)		Ether		Nitric Acid (70%)		Toluene
	Acetone		Ethylamine		Oxalic Acid		Transformer Oil
	Aluminium Chloride		Ethylene Glycol		Ozone (Gas)		1,1,1-Trichloroethane
	Aniline		Ethyl Ethanoate		Paraffin oil		Trichloroethylene
	Benzaldehyde		Freon 32		Petrol		Turpentine
	Benzene		Hydrochloric Acid (10%)		Phenol		Vegetable Oil
	Carbon tetrachloride		Hydrochloric Acid (36%)		Sea Water		Vinyl Acetate
	Chlorine water		Hydrogen Peroxide (35%)		Silver Nitrate		Water
	Chloroform		Hydrogen Peroxide (87%)		Skydrol		White Spirit
	Citric Acid		Lactic Acid		Sodium Chloride		Zinc Chloride
	Copper Sulphate		Lubricating oil		Sodium Hydroxide (10%)		
	Cresol		Methanol		Sodium Hydroxide (60%)		

The information above is given as a guide only and is based on published technical data and experience. The chemical resistance of the above products is dependant on factors such as chemical exposure, concentration of the chemical and temperature. The above chemicals are valid for a temperature of 23°C. Use of the above table is at the users own discretion and risk. Those using it must satisfy themselves that their application presents no health and safety risks. The end user should assess compatibility with their application and contact Thomas & Betts for further information.

ADHERENCE TO THE CURRENT WIRING REGULATIONS BS7671 OR NEC WIRING REGULATIONS (FOR USA) IS STRONGLY ADVISED.

MINIMUM BEND RADIUS FOR FLEXING IS DEPENDANT UPON MINIMUM TEMPERATURE, BENDING FREQUENCY AND CHEMICAL ENVIRONMENT.

The Company's policy is one of continuous improvement and reserves the right to change specifications at any time without prior notice.

Cable Management Products Ltd.

CMG House - Station Road - Coleshill - B46 1HT - United Kingdom
 Tel: +44(0)1675 468 222 - Fax: +44(0)1675 464 930

Technical Support e-mail: cmg.conduitsystems@tnb.com - www.adaptaflex.co.uk



A Member of the ABB Group